

NOW AVAILABLE

Midwestern M560 Hydraulic Sideboom Attachment


mounted on
CAT D6M LGP / D6N LGP

➔ With the 6 way blade & rear counterweight installed, the M560 will lift 60,000 lbs (27,273 Kg) @ 4', the same as the CAT 571G.

➔ Load and boom winches feature a fail-safe static & dynamic braking system designed to hold in the event of engine failure or hydraulic line break.

➔ Simultaneous control of load and boom winches allowing the operator to keep the load parallel with the ground while booming in or out.

➔ Sideboom assembly will not affect dozer blade operations.

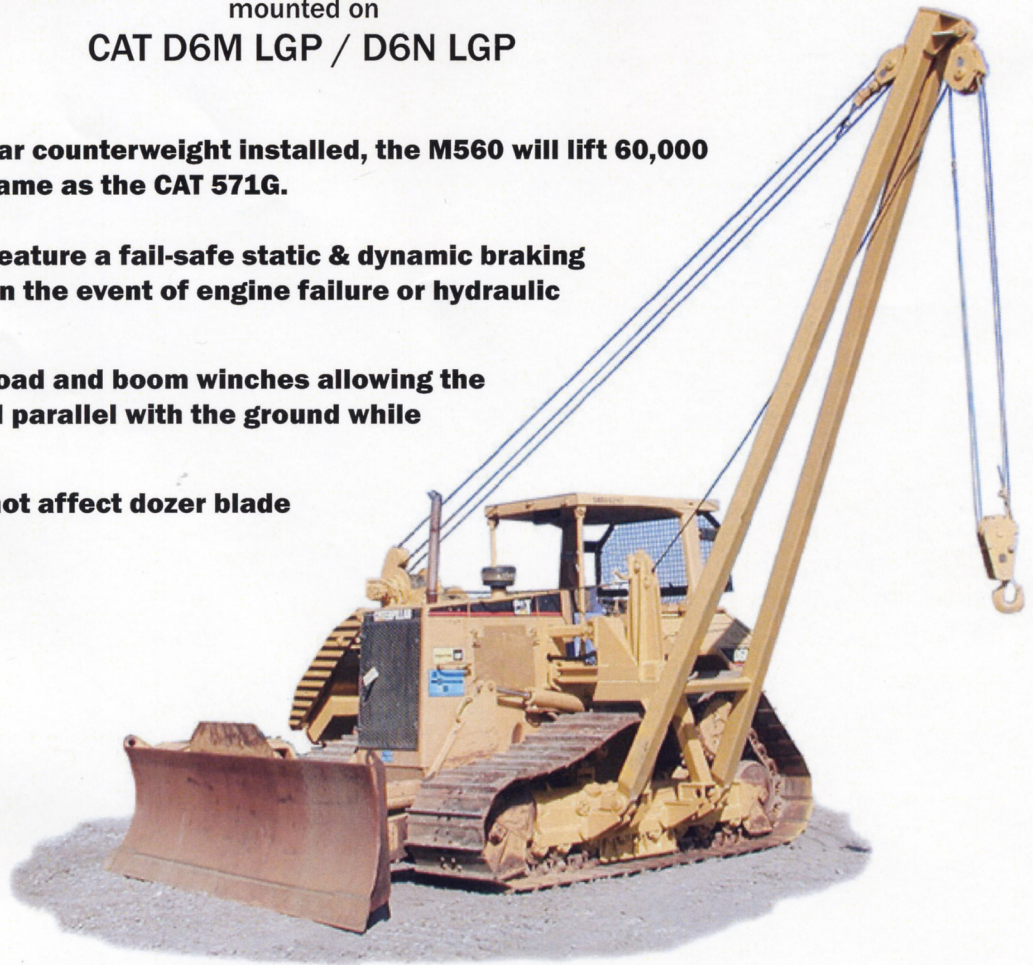

PIPELAYER COMPARISON

D6M LGP / D6N LGP	MODEL	571G
60,000 lbs.	LIFT CAPACITY @ 4'	60,000 lbs.
140	FLYWHEEL HP	200
53,000 lbs.	WEIGHT	50,000 lbs.
3,780 lbs.	COUNTERWEIGHT SEGMENTS	6,650 lbs.
85 in.	TRACK GAUGE	78 in.
121 in.	LENGTH of TRACK on the GROUND	107 in.
24 in.	OPTIONAL TRACK SHOE WIDTH	24 in.
5,808 sq. in.	GROUND CONTACT AREA	5,136 sq. in.